



MANUAL
OPERATION




EASY
INSTALL


FOREST MCS[®] *Multi Channel System*

Versatile multi channel track, to accommodate for a full sheer curtain, a separate blackout curtain and a decorative curtain. Available in 2/1, 2/3 and 3 glide track system.

THE WORLD
BEHIND
YOUR
CURTAINS

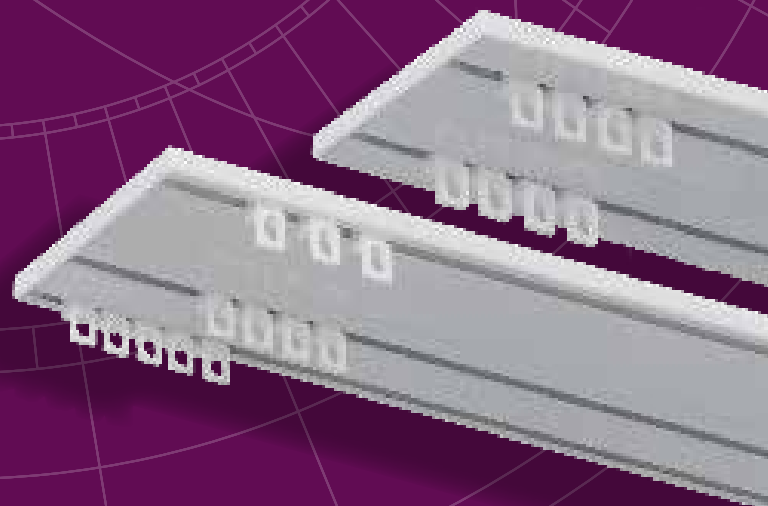

FOREST MCS®

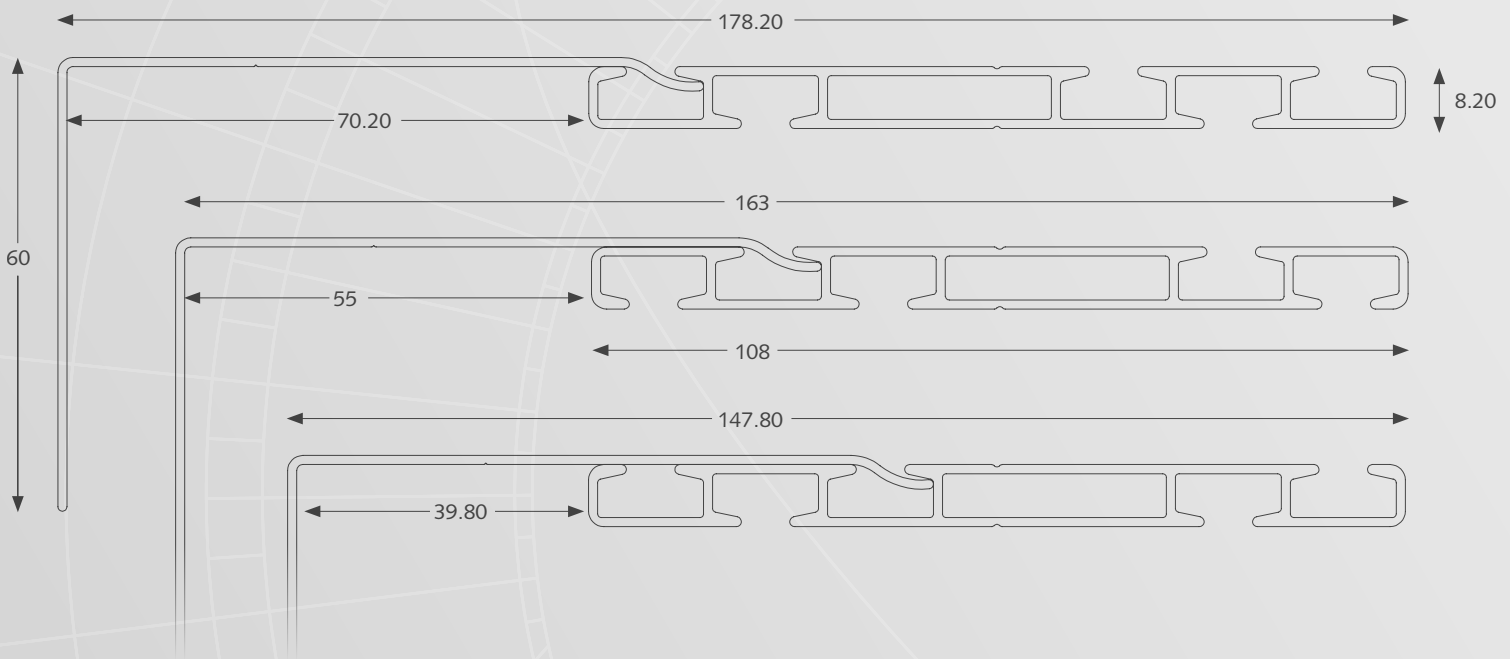


MCS TRACK 2/3 GLIDE PRODUCT INFORMATION

- Asymmetric Reversible Multi Channel System, for use as a 3 or 2 channel track;
- Profile thickness only 8 mm;
- Easy installation thanks to 4,5 mm pre-drilled holes; For countersunk installation, 10mm cover caps also available. A profile version without pre-drilled holes is also available;
- Available in white, anthracite and black.
- KS components can be used;
- FES also applicable on MCS;
- Maximum fabric weight 15 kg per running meter of the track.
- Optional pelmet profile;

PROFILE

- Aluminium extrusion, powder coated, lubricated.
- Available in 6 meter length.
- One side of the profile has 3 channels, asymmetrically placed, to accommodate for a full sheer curtain, and two separate blackout curtains; these blackout curtains can overlap each other to prevent light leakage. The wider the fabric panels, the bigger the overlap will become.
- The other side of the profile has 2 channels, symmetrically placed, to accommodate for a sheer and blackout curtain in a traditional set-up.

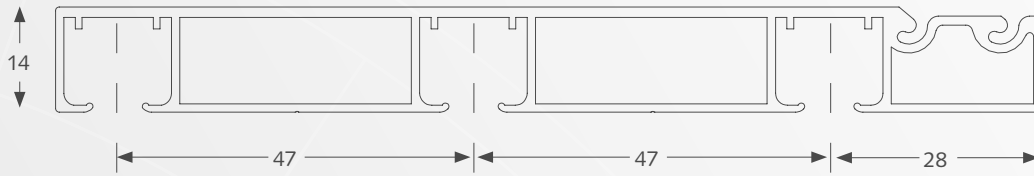

MCS TRACK 3 GLIDE PRODUCT INFORMATION

- 3 glide Multi Channel track System
- Easy installation thanks to pre-drilled holes
- Sufficient spacing between the channels to allow for different pleating options
- Available in white
- KS components can be used
- FES also applicable on MCS
- Maximum fabric weight, 30 kg per running meter of track

PROFILE

The weight of the track is 1.14 kg/mtr.

- Aluminium extrusion, white powder coated, lubricated.
- Available in 4 and 5 meter length.
- Holes for fixing the track are pre-drilled every 50cm.
- Plastic cover caps for the fixing holes are available.



MCS TRACK 2/1 GLIDE PRODUCT INFORMATION

- Reversible Multi Channel System, for use as a 2 or 1 channel track
- Profile thickness only 8 mm
- Available in white
- KS components can be used
- Maximum fabric weight 15 kg per running meter of the track
- Optional pelmet profile

PROFILE

- Aluminium extrusion, powder coated, lubricated.
- Available in 6 meter length.
- One side of the profile has 2 channels, to accommodate two separate blackout curtains; these blackout curtains can overlap each other to prevent light leakage.
- The other side of the profile has 1 channel, to accommodate for a sheer or a curtain in a traditional set-up.

FOR USE IN
















Hotels, offices, residences, boats, campers, planes or anywhere an efficient Multi Channel track System is required for curtains and drapes.

MCS 2/3 GLIDE PELMET PROFILE

A specially developed pelmet profile, aluminium extrusion, which can be placed on top of the MCS track during installation and secured in place. The perfect solution if no separate pelmet or curtain box has been foreseen.

BLACKOUT PROFILE

The ideal solution to create a perfect blackout on the side of each curtain. The Velcro Hotel Profile is suitable for any Forest curtain rail system. The L shaped profile comes with pre-drilled holes every 50 cm, allowing for an easy fixation on the sides of the window. When the curtain hems are lined with Velcro loop tape, the curtain can be easily fixed against the profiles, eliminating light leakage.

MCS 2/3 glide	MCS 3 glide	MCS 2/1 glide	ARTICLE	PACKING UNIT		ART.NR
		●	 MCS TRACK 2/1 GLIDE Aluminium extrusion, white powder coated, profile can be locked into place at the top of the track.	6 mtr/bundle	white - 6 mtr	5302041600
		●	 MCS 2/1 GLIDE ENDCAP WITH SCREW Constructed of UV-resistant plastic	10/box	white	5316201000
●			 MCS TRACK 2/3 GLIDE Aluminium extrusion, white powder coated, profile can be locked into place at the top of the track.	1/each	white, 4 mtr white, 6 mtr white, 6,5 mtr white, 4 mtr predrilled white, 6 mtr predrilled anthracite, 4 mtr anthracite, 6 mtr black, 4 mtr black, 6 mtr	5302021400 5302021600 5302021650 5302021400-P 5302021600-P 5302025400 5302025600 5302026400 5302026600
●			 MCS 2/3 GLIDE ENDCAP, with screw Constructed of UV-resistant plastic	10/box	white black	5316101000 5316106000
●		●	 MCS 2/3 GLIDE PELMET PROFILE Aluminium extrusion, white powder coated, profile can be locked into place at the top of the Multi Channel Track.	1/each	white, 4 mtr white, 6 meter black, 6 meter	5302031400 5302031600 5302036600
	●		 MCS TRACK PREDRILLED Aluminium extrusion, white powder coated, lubricated, predrilled	20/bundle	white, 4 mtr white, 5 mtr white, 6 mtr	5301001400 5301001500 5301001600
●	●	●	 VELCRO HOTEL PROFILE Inside frame fix, to reduce light leakage in combination with looptape LOOPTAPE	120 mtr/bundle 25 mtr/roll		3581601600 3816202020
●		●	 MCS 2/3 GLIDE CONNECTOR Straight - Steel	10/box		5305200006
●	●	●	 CARRIER "Clickable", offset, constructed of UV-resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation.	500/box	white black	1010001000 1010006000
●	●	●	 TWIST END STOP "Twists" into track, with metal plate, constructed of UV-resistant plastic.	100/box	white black	1016201000 1016206000
●	●	●	 ECONOMY CARRIER SMALL Can turn in the track	500/box	white black	3910101000 3910106000
●	●	●	 CRS CARRIER ROUND Can turn in the track	500/box	white grey black	5810101000 5810103000 5810106000
●	●	●	 BATON FIBERGLASS 092 cm (36"), 122 cm (48"), 152 cm (60"). BATON 092 cm (36"), 122 cm (48"), 152 cm (60"). BATON ALUMINIUM 092 cm (36"), 122 cm (48"), 152 cm (60").	100/box 50/box 50/box	white transparent white grey black antique	1065101... 1065102... 1065111... 1065113... 1065116... 1065119...
●	●		 MCS COVER CAP, 10mm. The cap covers the screw hole and ensures a stylish and ultimate finished look.	500/box	white black	5399999999 5399999996
●	●	●	 FOREST LUBRICANT To lubricate components during assembly.	1/each		5109010000