






-  Hey Google
-  Hey Siri
-  Hey Alexa



DOMOTICS
READY



APP
CONTROL



WIRELESS
REMOTE




TOUCH
CONTROL

FOREST SHUTTLE® & FMS® Series

The Forest Shuttle® curtain motor and the Forest Motorised curtain track System (FMS®) make an unbeatable combination when it comes to a troublefree operated electric curtains.

FOREST SHUTTLE® S
FOREST SHUTTLE® M
FOREST SHUTTLE® L
FOREST SHUTTLE® AC
FOREST SHUTTLE® iOn

FOREST FMS®
FOREST FMS® Plus
FOREST FMS® Plus Recess
FOREST FMS® Dual

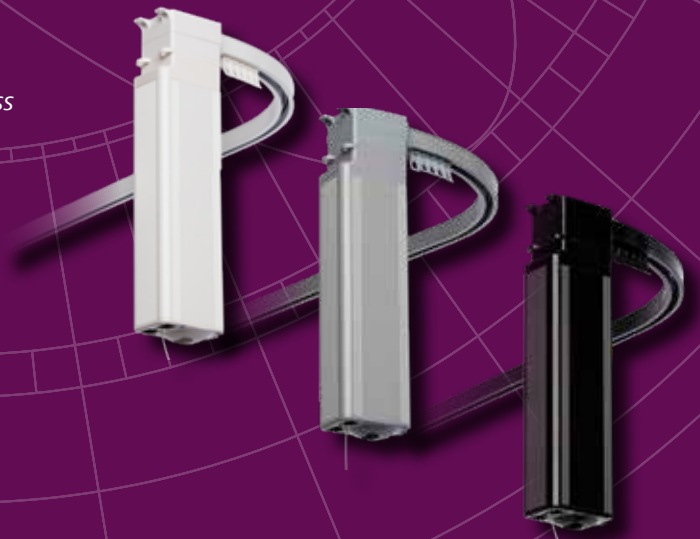

THE WORLD
BEHIND
YOUR
CURTAINS

FOREST SHUTTLE® Series



When it comes to comfort, the Forest Shuttle® lives up to its expectations. Being able to open and close your drapes remotely, from the comfort of your chair, when you are on holiday, automatically at pre-programmed opening and closing times or even linked to variable sunrise and sunset times. The Forest Shuttle® is the silent force behind the opening and closing of draperies all over the world.

The Shuttle® can be fully integrated in all major home automation systems.

For maximal safety, integrated emergency control ensures manual operation of the drapery in case of power failure.

The smooth and silent running curtain track system can, in addition to remote operation, also be operated by hand. Thanks to Touch Control technology, a gentle pull on the curtain is enough to activate the motor.

COLOUR OPTIONS SHUTTLE®



White



Grey



Anthracite



Black

PRODUCT INFORMATION

The Forest Shuttle® family of motors offer the following functions:

- High quality, extremely reliable and ultra silent motor.
- Integrated RF multi receiver, for Diamond Sense Remote control or wall switch.
- Various control options: App control, Remote Control (RF), Wall Switch Domotics, Building/Hotel Automation, Serial Communication, Z-Wave etc.
- Full automatic setting of the limits.
- Programming of intermediate positions possible.
- Touch Control Technology, gently pulling the curtain by hand will activate the motor. Sensitivity adjustable¹.
- Integrated Emergency Control with automatic declutch in case of power failure, to ensure a manual operation of the curtains.
- Stack-back position programmable to every desired setting;
- Can be used in combination with various motorised track systems like Forest Motorised Track System (standard option), FMS Dual Channel system, Motorised Design System (DS-XL LED) and Motorised Rod System (MRS).
- Can be mounted on the left or the right side of the track.
- Can be used with curved Forest motorised track systems.
- Integrated Z-Wave Plus as option (only Shuttle® S/M/L).
- For Skylight System (FSS®) a special Shuttle® M motor with receiver and fixed drive is available.
- Tandem motor application possible as well.
- Upside down inverted motor mounting available.
- Variable velocity with slow start and slow stop.
- Warranty: 10 years on motor (2 years on battery pack iOn)

¹ Except Shuttle® AC



DECORATIVE TRACK OPTIONS

The whole range of Forest motors' are totally compatible throughout our electrically operated curtain track range including the decorative options like the DS-XL LED motorised system and the Motorised Rod System (MRS).



reddot winner 2021



**DS-XL® LED
DESIGN TRACK**



**MRS®
MOTORISED ROD TRACK**

SHUTTLE DEMO SUITCASE

We have developed a special demo case for the Forest Shuttle®. In this flightcase you will find a sample of the motorised Forest Shuttle® L system.

The case also contains examples of the motorised FMS Plus® track, a 'Forest Diamond Sense' remote control, a wireless wallswitch and the Wi-Fi Dongle. All other accessories and documentation are of course included.



FOREST SHUTTLE® SERIES

The Forest Shuttle® is offered in 5 versions. Choose which Forest Shuttle motor best suits your application integration needs:



SHUTTLE® S
24 Volt



SHUTTLE® M
24 Volt



SHUTTLE® L
100 - 240 Volt



SHUTTLE® AC
100 - 240 Volt



SHUTTLE® iOn
14,8 Volt



FOREST SHUTTLE® iOn



Our bestselling Forest Shuttle® system is also available in a wireless, battery powered version. The Shuttle® iOn is perfect for areas without nearby power points.

An extensive period of research, development and endurance testing on countless of track set-ups has resulted in the Forest Shuttle® iOn. The Shuttle® iOn's motor is fitted with an internal, removable heavy duty battery pack. Depending on the track size and curtain weight, the battery only needs to be charged 2 to 3 times per year.

You can expect the same unique functionalities as that of the wired Shuttle® L, like Touch Control technology. The motor has an integrated Multi RF receiver, allowing for operation using any Forest remote control option.

Unique in the market

The Shuttle® iOn can be used in combination with curved tracks, which is unique in the market. It fits all Forest motorised track systems, like the FMS® system, FMS® Plus recess system, MRS® motorised rod system and also the DS®-XL motorised track systems.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms or anywhere a wireless motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Li-ion rechargeable battery pack;
- Suitable for curtains up to 25 kg and 8 meter track length (straight track);
- Suitable for bended/curved curtain tracks with up to 2 bends in, for example, bay windows;
- A single full charge will last up to 6 months;
- Available colours: white, black.



FOREST SHUTTLE® Control Options

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. When controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customised room scenes that allow your curtains to operate on their own throughout the day.



FOREST DIAMOND SENSE REMOTE

15 or 2 Channel Remote control. Control up to 15 systems individually and in group by integrated timer function or manual. Auto-On mode, when holding hand above it, the integrated LED light will automatically come on. Radio control, range up to 30 meters. Including magnetic wall support.




FOREST WI-FI DONGLE

With the Shuttle® Wi-Fi dongle, you can control your motorised curtains on your mobile device via the Forest Connect app or even by voice command with the easy integration in for example Google Home, Amazon Echo or Apple Siri without the need for an additional hub or gateway.



FOREST WIRELESS CONNECTOR

The Forest Wireless Connector is an easy way to make the motorised curtain systems 'smart'. This wireless remote solution works in combination with an analogue timer or a smart plug such as services as Apple HomeKit or Google Assistant or Amazon Alexa become available. With the Forest Smart Plug it is possible to control by the Forest Connect app. The Wireless Connector is also easily incorporated into most popular building management systems, including dry contact controls.



BUILDING AUTOMATION / HOTEL CONTROL

The Forest Shuttle® can be connected to any Building Automation system, by relay control.

SMART DEVICE CONNECTIVITY

	Shuttle S/M/L	Shuttle S/M/L/ with Z-Wave	Shuttle iOn	Shuttle AC	Forest Connect app	Google Home	Apple Homekit	Amazon Alexa	Google Assistant	Apple Siri	Voice control
Forest Wireless Connector One way transmitter to control curtains by third party apps or by Domotics. (433Mhz)	●		●		● ¹	● ¹	● ²	● ¹	● ¹	● ¹	● ¹
Forest Wi-Fi Dongle in combination with Forest Connect app	●	●			●	●		●	●	●	
Smartwares Controller in combination with HomeWizard lite app (433 Mhz)	●		●					●			
Homey in combination with Homey app	●	●	●			●	●	●	●	●	
FIBARO System in combination with FIBARO Home Center app		●		● ³		●	●	●	●	●	
Samsung SmartThings Hub in combination with Samsung SmartThings app		●				●	●	●	●	●	
230 Volt hard-wired building management system	● ⁴			●							

- 1) In combination with Forest smart plug
- 2) In combination with Apple Homekit smart plug
- 3) Only with FIBARO Roller Shutter 3 / Walli Roller Shutter
- 4) In combination with an AC Control Set

WORKS WITH



www.amx.com



www.knx.nl



www.z-wave.com



www.crestron.com



www.smart-homes.nl

Forest Shuttle® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

FOREST SHUTTLE® Technical information



SHUTTLE® S

SHUTTLE® M

SHUTTLE® L

SPECIFICATIONS

Voltage Shuttle	24V DC	24V DC	100 - 240V~ 50 - 60Hz 0.8A
RF Multi Receiver	Internal	Internal, optional	Internal
Power Supply	External, 100 - 240V AC - 0,8A - 50 - 60Hz; Output 24V DC - 2,5A	External, 100-240V AC - 1,5A - 50-60Hz; Output 24V DC - 2,7A	Internal
Max. power	40W	65W	40W
Torque:	1.0 Nm	1.5 Nm	1.0 Nm
Speed:	14-17cm/s	14-17 cm/s	14-17cm/s
Noise Level:	< 40 dB(A)	< 40 dB(A)	< 40 dB(A)
Max. curtain weight (without curves)	40 kg	70 kg	40 kg
Dimensions Motor:	7 x 5 x 20 cm	7 x 5 x 23 cm	7 x 5 x 28 cm
Net. Weight Motor	700 gr.	930 gr.	930 gr.
Dimensions Power Supply	50 x 80 x 30 mm	50 x 110 x 30 mm	-
Protection degree	IP20	IP20	IP20
Max. running time	240 sec (in one direction)	240 sec (in one direction)	240 sec (in one direction)
Colour options	White / Anthracite / Black	White / Grey / Anthracite / Black	White / Anthracite / Grey / Black
Certification & Marking:	CE/FCC	CE/FCC	CE/FCC

FEATURES

Touch Control technology	√	√	√
Integrated Emergency control	√	√	√
RF Communication Standard	√	√	√
Z-Wave communication	√	√	√
Automation System compatible	√	√	√
Wi-Fi compatible	√	√	√
Works with DS-XL LED Dimmer	√	√	√ (additional adaptor needed)
Works with Wireless Connector	√	√	√
Can be used with curved track	√	√	√
Plug & Play	√	√	√
Warranty	10 Years	10 Years	10 Years



SHUTTLE® AC

SHUTTLE® iOn

SPECIFICATIONS

Voltage Shuttle	100 - 240V~ 50 - 60Hz 0.8A	14.8V DC
RF Multi Receiver	Internal	Internal
Power Supply	Home Automation 230V	Charger Input 100 - 240~, 50-60Hz, 2.0A Charger Output 16,8Vdc 1000mA Removeable Battery Pack
Max. power	40W	30W
Torque:	1.0 Nm	1.0 Nm
Speed:	14-17cm/s	14-17cm/s
Noise Level:	< 41 dB(A)	<40 dB(A)
Max. curtain weight (without curves)	40 kg	25 kg
Dimensions Motor:	7 x 5 x 28 cm	7 x 5 x 32 cm
Net. Weight Motor	980 gr.	1160 gr.
Dimensions Power Supply	-	-
Protection degree	IP20	IP20
Max. running time	240 sec (in one direction)	150 sec (in one direction)
Colour options	White	White / Black
Certification & Marking:	CE	CE

FEATURES

Touch Control technology	-	√
Integrated Emergency control	√	√
RF Communication Standard	√	√
Z-Wave communication	-	-
Automation System compatible	√	√
Wi-Fi compatible	-	-
Works with DS-XL LED Dimmer	-	√ (additional adaptor needed)
Works with Wireless Connector	-	√
Can be used with curved track	√	√
Plug & Play	-	√
Warranty	10 Years	10 Years on motor, 2 years on battery pack

FOREST MOTORISED TRACK SYSTEM - FMS®



The Forest Shuttle® and the Forest motorised curtain track system (FMS®) make an unbeatable combination when it comes to noiseless operated curtains.

The FMS® System is an elegant system for all types of medium and heavyweight draperies. Available length up to 14 meter in 3 colours: timeless white and in a stylish black or grey finish, making it suitable to fit in every design.

FMS® PLUS AND RECESS FIXATION

Instead of a regular ceiling fix or wall fix installation of the FMS® track system, Forest Group also offers a solution for recess fixed motorised curtain track. The FMS® Plus system is ideal for a clean, concealed curtain track installation. The recess profile can be fitted during the construction of the ceiling, the FMS® Plus motorised track can then be fitted once all the finishing works have been completed. The motor can be placed in a regular position, or upside down into the ceiling. The system can be fitted with the regular FMS® carriers, rotating carriers or the Forest Wave System for wave pleat.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms, business meeting rooms, conference centers or anywhere a silent motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Compact and noiseless operated motorised track system
- All Shuttle® motors can be used on the FMS® System;
- Available in white, grey and black;
- Components in matching colours;
- Clickable off-set carriers for a straight heading of the curtain; rolling carriers and Easyflex carriers also available;
- Especially designed for use in combination with Forest Wave System;
- Motor can be mounted on the left or the right of the track.
- One-way draw or center (split) draw curtains possible;
- All KS® bracket compatible;
- Ceiling brackets and wall brackets available;
- FMS® track can be made in lengths of up to 14 meter;
- FMS® track can be curved/bended;
- Recess fixation possible by recess profile in combination with FMS® Plus track.
- Warranty: 10 years


FMS® DUAL **NEW!**

The FMS® Dual System is the new standard for the hotel industry when it comes to motorised curtain tracks. The FMS Dual is a unique motorised two channel curtain track system. Only one Shuttle motor is required to operate two channels. This system is designed to create an overlap that prevents light from entering the room. Thanks to the two channels, it is possible to adjust the overlap to any position. Ideal for hotels where guests arrive during the day after a long journey and want to rest first. The FMS® Dual ensures that the hotel room is completely darkened and no

disturbing rays of light enter the room. The Dual system is easy to mount on the ceiling thanks to pre-drilled holes and additional carriers can easily be added later after the track has been fixed to the ceiling. In addition to single/double pleated curtains, the wave pleat can be applied via our FES® system.

BENDING / CURVING


The FMS® track and FMS® Plus track (except recess profile) can be bended and reversed bended with a radius of 20 cm (8"). Continuous curving can be done with the Electric Powered Bender.



PROFILE


FMS® Track

- Weight 303 gr/mtr.
- Size 20 x 20 mm
- Aluminium extrusion
- Colours available: white, grey & black




FMS® Plus Track

- Weight 500 gr/mtr.
- Size 19,6 x 30 mm
- Aluminium extrusion
- Colours available: white & black




FMS® Plus Recess Profile

- Weight 555 gr/mtr.
- Size 26 x 32,20 mm
- Aluminium extrusion
- Colours available: white & black



FMS® Dual

- Weight 1,11 kg/mtr.
- Size 72 x 24 mm
- Aluminium extrusion
- Colour available: white



FOREST FMS® TRACKS

The FMS® track system is in four versions available:

FMS® TRACK



FMS® PLUS




RECESS PROFILE WITH FMS® PLUS TRACK


























FMS® DUAL (FOR BLACKOUT)

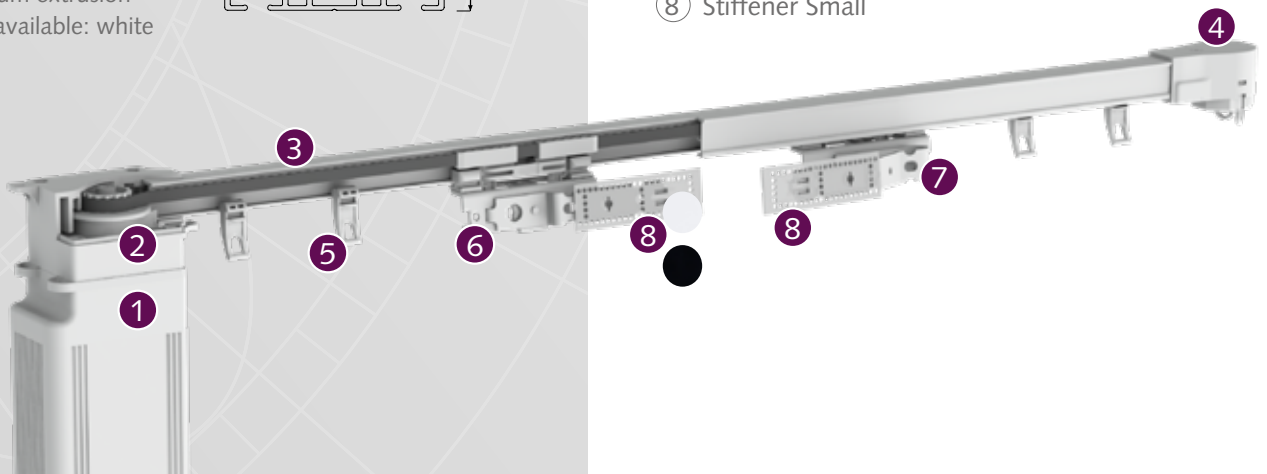

































- ① Shuttle® Motor
- ② Motor Pulley
- ③ FMS® Track
- ④ FMS® Return Pulley
- ⑤ FMS® Glider
- ⑥ FMS® Master Carrier Underlap
- ⑦ FMS® Master Carrier Overlap
- ⑧ Stiffener Small





















FMS	FMS PLUS	FMS DUAL	MOTOR & CONTROL OPTIONS	ARTICLE	PACKING UNIT		ART.NR	
●	●	●		SHUTTLE L Motor with internal RF Receiver, Touch Control and Emergency Control. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 23 cm Up to 45 kg curtain weight	1/box	100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V	white int. multi receiver white int. Z-Wave receiver white int. Z-Wave rec. ANZ white int. Z-Wave rec. India grey int. multi receiver anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU	5232000001 5232000002 5232000007 5232000069 5232003001 5232005001 5232006001 5232006002
●	●	●		POWER CABLE FOR SHUTTLE L & S	1/box	EU 1.00 mtr EU 4.00 mtr UK 4.00 mtr USA 2.00 mtr AUS 1.80 mtr EU 4.00 mtr	white white white white white black	5201001101 5201001104 5201001134 5201001121 5201001141 5201006104
●	●	●		SHUTTLE M Strongest motor with internal RF Receiver, Touch Control System and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 75 kg curtain weight	1/box	24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC	white int. multi receiver white int. Z-Wave receiver EU white int. Z-Wave US/908Mhz grey int. multi receiver anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU	5232000003 5232000004 5232000006 5232003003 5232005003 5232006003 5232006004
●	●	●		SHUTTLE M FOR SKYLIGHT SYSTEM (FSS) Motor with fixed drive	1/box	24 Volt DC	white int. multi receiver	7131000000
●	●	●		ADAPTOR SET SHUTTLE M Incl. cable and holder	1/box	EU 0.50 mtr EU 3.00 mtr UK 0.50 mtr USA 0.50 mtr EU 0.50 mtr	white white white white black	5201002002 5201002003 5201002004 5201002007 5201006002
●	●	●		SHUTTLE S Motor with internal RF Receiver, Touch Control and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 40 kg curtain weight	1/box	24 Volt DC	white int. multi receiver white int. Z-Wave receiver EU anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU	5232000000 5232000010 5232005000 5232006000 5232006010
●	●	●		ADAPTOR SET SHUTTLE S Incl. holder / excl. cable	1/box	24 Volt	white	5232003002
●	●	●		SHUTTLE AC Motor with internal RF Receiver and Emergency Control. Only for Building Management System. 100 - 240V 50 - 60Hz 0.8A Power supply Up to 40 kg curtain weight	1/box	100-240V	white	5233000000
●	●	●		SHUTTLE ION Incl. Battery Pack (14.4 V DC) Dimensions 7 x 5 x 32 cm Up to 25 kg curtain weight	1/box	Accu Pack	white black	5234000000 5234006000
●	●	●		SHUTTLE ION BATTERY PACK 4-Cell Lithium iOn Capacity 3400mAh	1/box		white black	5234000001 5234006001
●	●	●		SHUTTLE ION CHARGER CABLE 1.20 mtr cable	1/box	EU UK USA AUS	black black black black	5234000002 5234000003 5234000004 5234000005
●	●	●		DC EXTENSION CABLE FOR 24V ADAPTOR For use with Shuttle S/M adaptor and dimmer DS-XL LED	1/box	2 mtr	white	5209002200
●	●	●		AC CONTROL SET Use the AC Control in combination with the Shuttle Motor for Live AC (Domotics) AC Control set complete	1/box	220 Volt	white grey black	5201002202 5201003202 5201006202
				Secondary unit-potential free relay		200V-240V	white grey black	5201002200 5201003200 5201006200
				Secondary unit-potential free relay		100V-120V	white US	5201002203











FMS	FMS PLUS	FMS DUAL	MOTOR & CONTROL OPTIONS	ARTICLE	PACKING UNIT		ART.NR
●	●	●		FOREST DIAMOND SENSE REMOTE CONTROL	1/box	Works with all Shuttle motors white black	5201091470 5201096470
●	●	●		FOREST WIRELESS CONNECTOR Incl. 15 cm USB cable / excl USB charger One way transmitter to control curtains by third party Apps* (i.e. Google / Apple / Amazon) or by Domotics. *always in combination with Forest smart plug or third party plug	1/box	Works with all Shuttle motors white	5201002270
●	●	●		FOREST WIRELESS CONNECTOR USB CHARGER	1/box	EU UK AU US	5201002271-EU 5201002271-UK 5201002272-AU 5201002274-US
●	●	●		FOREST SMART PLUG WHITE The Forest Smart Plug allows App control via the Forest Connect App (the Forest Wireless Connector is required)	1/box	Works with all Shuttle motors EU UK AU US	5201001952-EU 5201001953-UK 5201001954-AU 5201001955-US
●	●	●		FOREST WIFI DONGLE Incl. cable WiFi 2.4GHz Power supply 12V DC 300mA max USB power 5V DC 1000mA max Control the curtains by Forest Connect App Easy integration third party apps by Google / Amazon Bi-directional	1/box	Works with all Shuttle motors except AC and iOn white black	5201002280 5201006280
●	●	●		FOREST SHUTTLE TWILIGHT SENSOR (KAKU)	1/box	Works with all Shuttle motors (besides Shuttle iOn) white	5201001951
●	●	●		FOREST WIRELESS WALL SWITCH 2-channel wall switch Dimensions: 8.5 x 8.5 x 1 cm	1/box	Works with all Shuttle motors white black	5201001480 5201006480
●	●	●		FOREST PULSE WALL SWITCH Can operate one motor only Dimensions: 6.5 x 5.5 x 2.7cm (2.56 x 2.17 x 1.06")	1/box	white	5201001900
●	●	●		SHUTTLE CLICK-ON RECEIVER For use with Forest remote in Z-Wave and building automation environments	1/box	white	5201001362
●	●			FOREST SHUTTLE DEMO FLIGHTCASE METAL Including: Shuttle with FMS complete, FMS Plus Recess complete. Samples: curved FMS, Alu SK wall bracket 7.5cm en 10cm, Alu SK ceiling bracket, Remote Diamond Sense (White/Black), Wireless Wall Switch (White/Black), WiFi Dongle.	Piece		9903000000









FMS	FMS PLUS	FMS DUAL	FMS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
●				FMS TRACK 5.80 mtr (19') 7.00 mtr (23') 7.00 mtr (23') 7.00 mtr (23')	10/bundle	white white grey black	5101001580 5101001700 5101003700 5101006700
●				FMS CARRIER Klickable, offset, made of UV-resistant plastic. 10 Carriers on a breakaway strip, can be clicked into the the track after installation.	250/box	white grey black	2510101000 2510103000 2510106000
●				ECONOMY SLIDE Can turn in the track	500/box	white black	2510610000 2510606000
●				FMS MASTER CARRIER SHORT R/L WHITE For use with single pleat or pinch pleat curtains For use with one way draw curtains To use in combination with Wave Return Pulley	25/box	white black	5215801001 5215806001
●				FMS MASTER CARRIER UNDERLAP CLICK ON Reversible Usable for Click on stiffner	15/box	white grey black	5215801010 5215803010 5215806010
●				FMS MASTER CARRIER OVERLAP CLICK ON Reversible Usable for Click on stiffner	15/box	white grey black	5215901010 5215903010 5215906010
●				UNDERLAP SINGLE R/L Reversible For single draw curtains	15/box	white black	3016001000 3016006000
●				PROLONGED OVERLAP CLICK ON 150 mm long 200 mm long	15/box	white black white black	9500001010 9500006010 9500001020
●				Z-SHAPED OVERLAP ARM Reversible Z-shaped overlap arm. Fits FMS master carriers. For further reducing of light leakage for center closing.	15/box	white	9500001030
●				STIFFENER CLICK-ON Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain	15/box		5116001001
●				FMS TRANSPORT BELT Toothed belt, to be installed inside the FMS Track	100mtr/roll		5105501000
●				FMS CONNECTOR To fix the FMS Master Carrier onto the FMS transport belt	50/box	white grey black	5103011500 5103013500 5103016500
●				FMS MOTOR PULLEY Connects motor with FMS Track	1/box	white grey black	5103011000 5103013000 5103016000
●				FMS MOTOR PULLEY UPSIDE DOWN	1/box	white	5103011003
●				FMS ANGLE PULLEY 45 degrees adjustable Only for up to 7kg curtain weight (Shuttle M)	1/box	white	5103011010
●				FMS RETURN PULLEY Reverses the FMS transport belt in the FMS track For center draw curtains	1/box	white grey black	5103011100 5103013100 5103016100
●				FMS TRACK JOINER Used to make a solid connection between two pieces of track	10/box	white grey black	2518401000 2518403000 2518406000











FMS	FMS PLUS	FMS DUAL	WAVE COMPONENTS FOR FMS	ARTICLE	PACKING UNIT		ART.NR
●				WAVE ADJUSTABLE MASTER CARRIER UNDERLAP For use with wave pleat curtains (Easyflex) See additional components below	25/box	white black	4813001050 4813006050
●				WAVE BELT CONNECTOR CENTER DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white black	4813001040 4813006040
●				WAVE BELT CONNECTOR ONE-WAY DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier	50/box	white black	4813001030 4813006030
●				WAVE RETURN PULLEY MOTORISED For use with wave pleat, single or pinch pleat curtains For wave pleat curtains use in combination with adjustable wave carrier (Easyflex) For single/pinch pleat curtains use in combination with FMS Master carrier short R/L White	25/box	white black	4813001060 4813006060
●				WAVE DS-XL END STOP To use in combination with adjustable wave carrier Easyflex For center draw curtains	100/box		3916001000
●				FMS RETURN PULLEY EASYFLEX For use with wave pleat curtains (Easyflex) For single draw curtains	1/box	white grey black	5103011102 5103013102 5103016102
●				WAVE ADJUSTABLE HOOK MOTOR For use with wave pleat curtains (Easyflex)	25/box	white black	4813001010 4813006010
●				WAVE ADJUSTABLE HOOK RETURN PULLEY For use with wave pleat curtains (Easyflex)	25/box	white black	4813001020 4813006020
●				EASYFLEX MASTER CARRIER LEFT For use with wave pleat curtains (Easyflex) For center draw	25/box	white grey black	4815351090 4815353090 4815356090
				90 degrees left for small stiffener		white	4815361090
●				EASYFLEX MASTER CARRIER RIGHT For use with wave pleat curtains (Easyflex) Center draw	25/box	white grey black	4815451090 4815453090 4815456090
				90 degrees right for small stiffener			4815461090
●				EASYSNAP MASTER CARRIER LEFT For use with wave pleat curtains (Easysnap) 90 degrees	15/box	white	4815301090
●				EASYSNAP MASTER CARRIER RIGHT For use with wave pleat curtains (Easysnap) 90 degrees	15/box	white	4815401090
●				EASYSNAP FMS MASTER CARRIER For use with wave pleat curtains (Easysnap)	15/box	white	4815401000
●				EASYSNAP FMS UNDERLAP L/R For use with wave pleat curtains (Easysnap)	15/box	white	4815401000
●				WAVE STIFFENER CLICK ON 'SMALL' For use with wave pleat curtains (Easyflex/Easysnap) Recommended to attach to the FMS master carriers, stiffener to be stitched into the curtain	15/box	white	4815001001

FMS	FMS PLUS	FMS DUAL	FMS PLUS TRACK + COMPONENTS	ARTICLE	PACKING UNIT	white black	ART.NR
	●			FMS PLUS TRACK 7.00 mtr (23')	10/bundle	white black	5131001700 5131006700
	●			FMS PLUS RECESS PROFILE 7.00 mtr (23')	1/piece	white black	5131011100 5131016700
	●			FMS PLUS RECESS PROFILE FIXING STRIP 7.00 mtr (23') length	1 piece	white black	5131001600 5131006600
	●			FMS PLUS RECESS FIXING WEDGE To fix the track into the recess profile	10/box	white black	5131001100 5131006100
	●			FMS PLUS RECESS CORNER TRACK Preshaped 90 degrees curve for FMS PLUS track	1/piece	white	5131011790
	●			ECONOMY CARRIER Can turn in the track	100/box	white black	2510601000 2510606000
	●			FMS PLUS MASTER CARRIER UNDERLAP Arm is reversible, incl. belt connector For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white black	5135801000 5135806000
	●			FMS PLUS MASTER CARRIER OVERLAP Arm is reversible, incl. belt connector For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white black	5135901000 5135906000
	●			FMS PLUS MASTER CARRIER EASYFLEX L&R 90 degrees For use with wave pleat curtains in combination with FES-system (Easyflex)	10/box	white	5135901010
	●			FMS PLUS TRANSPORT BELT Toothed belt to be installed inside FMS Plus track 9.3 x 2.2mm Material: KEVLAR	100mtr/roll		5135501001
	●			FMS PLUS MOTOR PULLEY Reverse the FMS PLUS belt in the FMS PLUS track	1/box	white black	5133011000 5133016000
	●			FMS PLUS RETURN PULLEY Reverse the FMS PLUS belt in the FMS PLUS track	100mtr/roll	white black	5133011100 5133016100
	●			FMS PLUS MOTOR PULLEY UPSIDE DOWN Can be used to place the motor upside down (recess)	1/box	white	5133011003

FMS	FMS PLUS	FMS DUAL	FMS PLUS TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART.NR
	●			FMS PLUS L-PULLEY To create a double overlapping track system in combination with only one motor	1/box	white	5133011101
	●			FMS PLUS RECESS COVER PLATE	1/box	white black	5133011104 5133016104
	●			FMS PLUS RECESS COVER PLATE UPSIDE DOWN Cover plate for recess; motor pulley	1/box	white black	5133011004 5133016004
	●			FMS PLUS BRIDGE 6,5 cm 28 cm	10/box	white black white black	4518701000 4518706000 4518601000 4518606000
	●			FMS PLUS TRACK CONNECTOR PIN Stainless steel, 2 x 20mm For a firm seamless connection	50/box		9900000012

FMS	FMS PLUS	FMS DUAL	FMS DUAL TRACK + COMPONENTS	ARTICLE	PACKING UNIT		ART. NR
		●		FMS DUAL Two guide track predrilled, aluminium extrusion, white powder coated, lubricated NEW!	1 length/7 mtr	white	3851001700
		●		FMS DUAL UPPER TRACK CONNECTOR Used to make a solid connection between two pieces of track	10/box	aluminium	3851000003
		●		FMS DUAL LOWER TRACK CONNECTOR For optimal guiding of the transport belt between two pieces of track	25/box	plastic	3851000002
		●		FMS DUAL MOTOR PULLEY Connects motor with track	5/box	white	3851000004
		●		FMS DUAL RETURN PULLEY Reverses the transport belt in the track	10/box	white	3851000005
		●		FMS DUAL ENDSTOP Plastic end stop can be used to set the overlap position	25/box	white	3851000006
		●		FMS DUAL MASTER SET For positioning the 1st carrier	10/box	white	3851000007
		●		FMS DUAL TRANSPORT BELT Toothed belt, to be installed inside the track	100 mtr/roll		3851000001
		●		MCS COVER CAP, 10mm. The cap covers the screw hole and ensures a stylish and ultimate finished look.	500/box	white	5399999999
		●		KS SYMMETRICAL CARRIER	500/box	white	1010101000

FMS	FMS PLUS	FMS DUAL	MOUNTING OPTIONS + OTHER ITEMS	ARTICLE	PACKING UNIT		ART. NR
●	●			SMART KLICK CEILING BRACKET Incl. cover cap 'Klicks' onto track, powder coated	100/box	white grey black	1018201001 1018203001 1018206001
●	●			ALUMINIUM WALL BRACKET 7.5 cm single (3')	20/box	white grey black	1020301075 1020303075 1020306075
				ALUMINIUM WALL BRACKET 10 cm single (4')	20/box	white grey black	1020301100 1020303100 1020306100
●	●			ALUMINIUM WALL BRACKET 15 cm double (6')	15/box	white grey black	1020301150 1020303150 1020306150
				ALUMINIUM WALL BRACKET 20 cm double (8')	15/box	white grey black	1020301200 1020303200 1020306200
				ALUMINIUM WALL BRACKET 25 cm triple (10')	15/box	white grey black	1020301250 1020303250 1020306250
●	●			SMART KLICK COVER CAP ALU WALL BRACKET UNIVERSAL	50/box	white grey black	1021301000 1021303000 1021306000
●	●			FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty.	100/box		7160001000

FMS	FMS PLUS	FMS DUAL	BENDING COMPONENTS + OTHER ITEMS	ARTICLE	PACKING UNIT		ART. NR
●	●			CONTRACT BENDING TOOL BASIC for FMS and FMS Plus	1/each		2560000000
●				FMS CONTRACT BENDING WHEEL radius 20 cm incl. wedges	1/each		2561000000
				FMS PLUS CONTRACT BENDING WHEEL ALL-IN radius 20 cm incl. wedges and bending strips	1/each		5131000000
●				FMS BENDING STRIPS 90 cm T-bending strip	1/each		5160100000
	●			FMS PLUS SET BENDING STRIPS 90 cm	1/each		4560100000
●	●			ELECTRIC POWERED BENDER	1/each	230V 110/115V	1060500000 1060500001
●				FMS BENDING WHEEL for electric bender, set of 3	1/set		2560700000
●				FMS BENDING STRIPS for electric bender 7 mtr	1/each		5160600000
	●			FMS PLUS BENDING STRIPS for electric bender	1/piece		5131000001
●	●	●		FOREST LUBRICANT To lubricate components during assembly	1/box		5109010000